REPOTEC CO., LTD. http://www.repotec.com
TEL: 886-2-8227-1888 FAX: 886-2-8227-1818

>> RP-IP509

4-P Broadband Router

RP-IP509 4-P Broadband Router provides one 10/100Mbps WAN interface to connect with DSL/ Cable Modem/ broadband internet access. Being integrated with 4 ports Fast Ethernet switch and MDI/MDIX auto-sensing is supported on each port, RP-IP509 enables users to connect with four PCs, access points, or printers easily. The built-in NAT function can act as a firewall to protect your internal network against outside hackers. Moreover, this router also supports web-based management for users to know its configuration and to upgrade new firmware simply.

FEATURE

- Integrates with 4 ports Fast Ethernet switch: 10/100Mbps MDI/MDIX auto-sensing
- Provides 10/100Mbps WAN interface to connect with DSL or cable modem for broadband Internet access
- Built-in NAT function: Allows multiple PCs and devices to share one Internet connection
- Browser-based interface configuration and management: OS independent, easy-to-use for consumer installation
- Built-in firewall to protect your Intranet
- Supports PPTP, L2TP
- Easy to upgrade: using Web or Windows Application to upgrade new version of firmware

SPECIFICATION

Standards	• IEEE 802.3 10Base-T Ethernet • IEEE 802.3u 100Base-TX Fast Ethernet
Interface	• 4-P * LAN, 1-P * WAN
Memory	• Flash 512KB, DRAM 2MB
Firmware Platform	• Proprietary Kernel
Management Method	• Web-based
WAN Type	• Static IP Address • Dynamic IP Address (DHCP Client) • PPPoE • PPTP • Dial-Up Network
Connection Scheme	• Connect on Demand/Auto-Disconnect • Manually Connect/Disconnect • Auto Reconnect
NAT Function	• One-to-Many NAT • One-to-One NAT • Virtual Server • Special Application • DMZ Host
Access Control	• MAC-level Access Control • Inbound/Outbound IP Filter • Domain Access Control
Firewall	• NAT Firewall with SPI mode • DoS Detection
Event Logging	• On-web logging • Syslog supported
Power Supply	• External power Adapter DC9V, 1A
Environment	• Operating Temperature: -20°C~ 70°C • Operating Humidity: 10%~90% (Non-Condensing)
Dimension	• 153 * 112 * 26 mm

Certifications	• FCC, CE

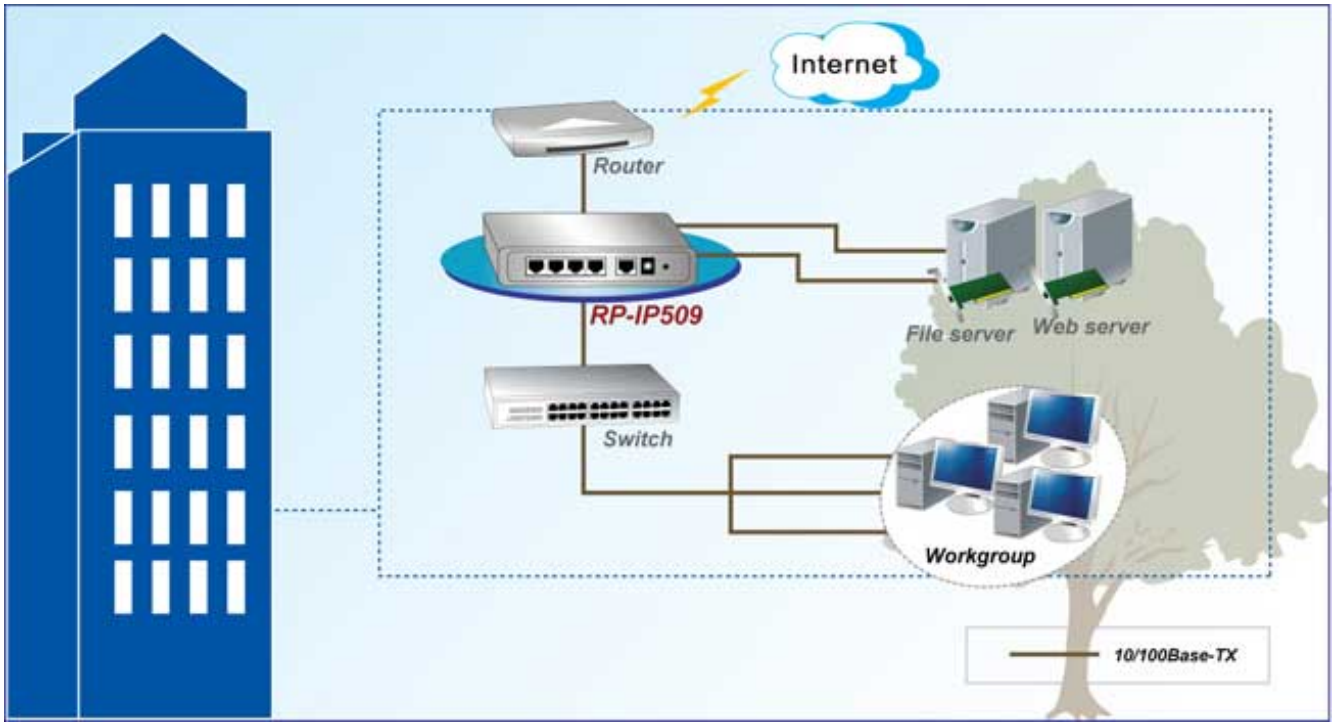

Ordering Information

RP-IP509 4-P Broadband Router